

TCC70S Multimedia Player



Specifications

Change History

Document Version	Release Date	Description
V1.0.1	2022-01-12	<ul style="list-style-type: none"> • Updated the connector descriptions. • Updated the dimension drawings. • Modified the specification table.
V1.0.0	2021-08-31	First release

Introduction

The TCC70S, launched by NovaStar, is a multimedia player that integrates sending and receiving capabilities. It allows for solution publishing and screen control via various user terminal devices such as PC, mobile phone and tablet. The TCC70S can access the cloud publishing and monitoring platforms to easily enable cross-region clustered management of screens.

The TCC70S comes with eight standard HUB75E connectors for communication and supports up to 16 groups of parallel RGB data. On-site setup, operation and maintenance are all taken into account when the hardware and software of the TCC70S were designed, allowing for an easier setup, more stable operation and more efficient maintenance.

Thanks to its stable and secure integrated design, the TCC70S saves space, simplifies cabling, and is suitable for the applications requiring small loading capacity, such as vehicle-mounted displays, small traffic displays, displays in communities, and lamp-post displays.

Certifications


None

If the product does not have the relevant certifications required by the countries or regions where it is to be sold, please contact NovaStar to confirm or address the problem. Otherwise, the customer shall be responsible for the legal risks caused or NovaStar has the right to claim compensation.

Features

- Maximum resolution supported by a single card: 512×384
 - Maximum width: 1280 (1280×128)
 - Maximum Height: 512 (384×512)
- 1x Stereo audio output
- 1x USB 2.0 port
 - Allows for USB playback.
- 1x RS485 connector
 - Connects to a sensor such as light sensor, or connects to a module to implement corresponding functions.
- Powerful processing capability
 - 4 core 1.2 GHz processor
 - Hardware decoding of 1080p videos
 - 1 GB of RAM
 - 8 GB of internal storage (4 GB available)
- A variety of control schemes
 - Solution publishing and screen control via user terminal devices such as PC, mobile phone and tablet
 - Clustered remote solution publishing and screen control
 - Clustered remote screen status monitoring
- Built-in Wi-Fi AP
 - User terminal devices can connect to the built-in Wi-Fi AP of the TCC70S. The default SSID is "AP+*Last 8 digits of SN*" and the default password is "12345678".
- Support for 4G networks (CAT4 by default)
 - Currently, 4G networks can be accessed in China only.
- Support for GPS positioning and GPS time synchronization
- Support for relays (maximum DC 30 V 3 A)


Appearance

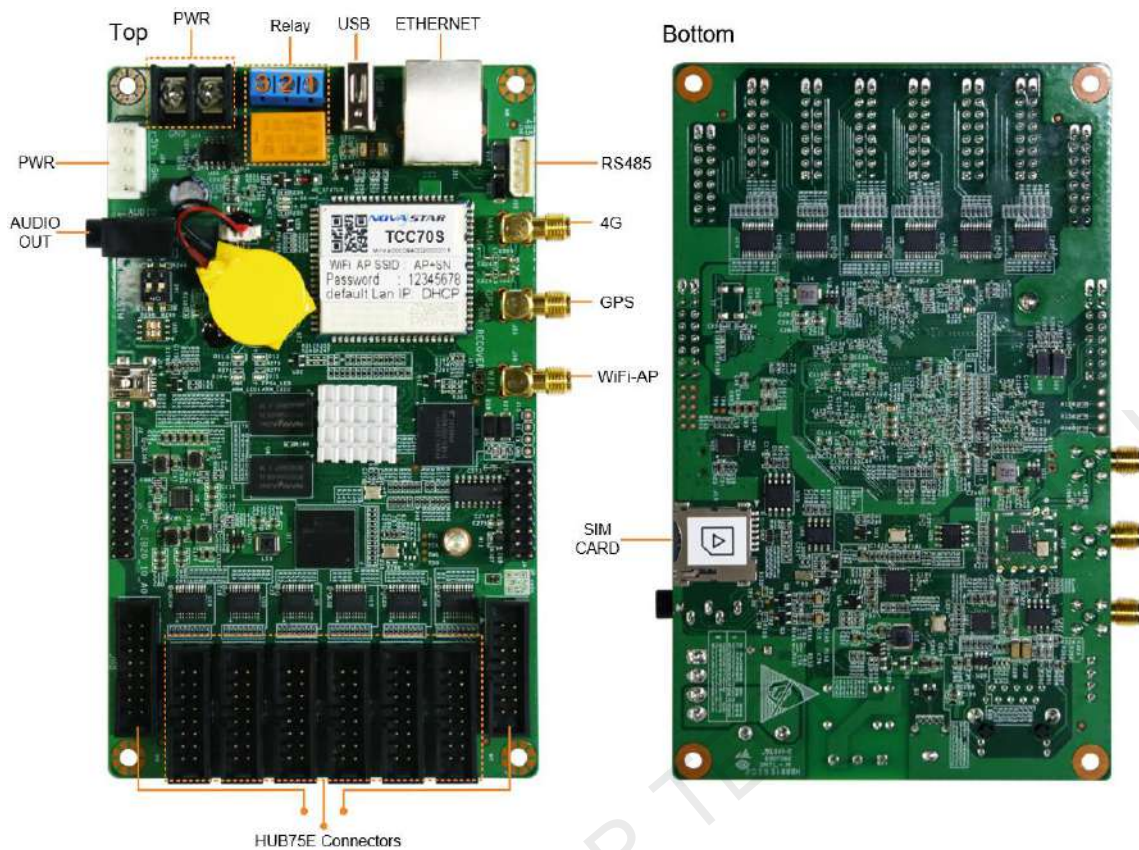


All product pictures shown in this document are for illustration purpose only. Actual product may vary.

Table 1-1 Connectors and buttons

Name	Description
ETHERNET	Ethernet port Connects to a network or the control PC.
USB	USB 2.0 (Type A) port Allows for playback of content imported from a USB drive. Only the FAT32 file system is supported and the maximum size of a single file is 4 GB.
PWR	Power input connector
AUDIO OUT	Audio output connector
HUB75E Connectors	HUB75E connectors Connect to a screen.
SIM CARD	SIM card slot
WiFi-AP	Wi-Fi AP antenna connector
GPS	GPS antenna connector
4G	4G antenna connector

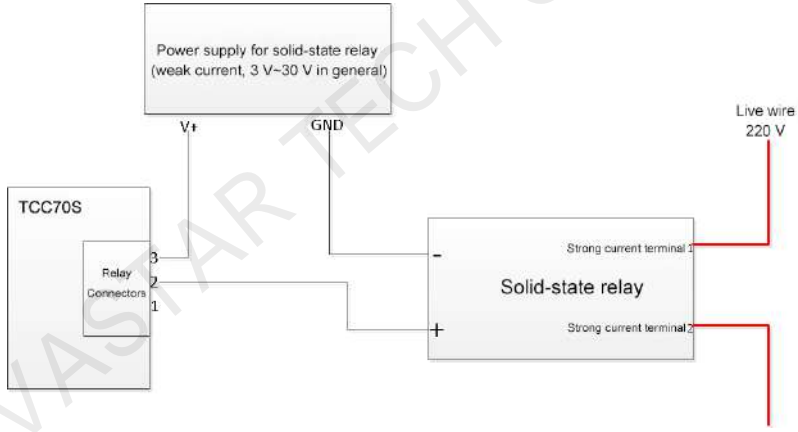Name	Description
RS485	RS485 connector Connects to a sensor such as light sensor, or connects to a module to implement corresponding functions.
Relay	3-pin relay control switch DC: Maximum voltage and current: 30 V, 3 A AC: Maximum voltage and current: 250 V, 3 A Two connection methods: Common switch: The connection method of pins 2 and 3 is not fixed. Pin 1 is not connected to the wire. On the power control page of ViPlex Express, turn on the circuit to connect pin 2 to pin 3, and turn off the circuit to disconnect pin 2 from pin 3. Single pole double throw switch: The connection method is fixed. Connect pin 2 to the pole. Connect pin 1 to the turn-off wire and pin 3 to turn-on wire. On the power control page of ViPlex Express, turn on the circuit to connect pin 2 to pin 3 and disconnect pin 1 from pin 2, or turn off the circuit to disconnect pin 3 from pin 2 and connect pin 2 to pin 1. Note: The TCC70S uses DC power supply. Using the relay to directly control AC is not recommended. If it is required to control AC, the following connection method is recommended. 

Dimensions

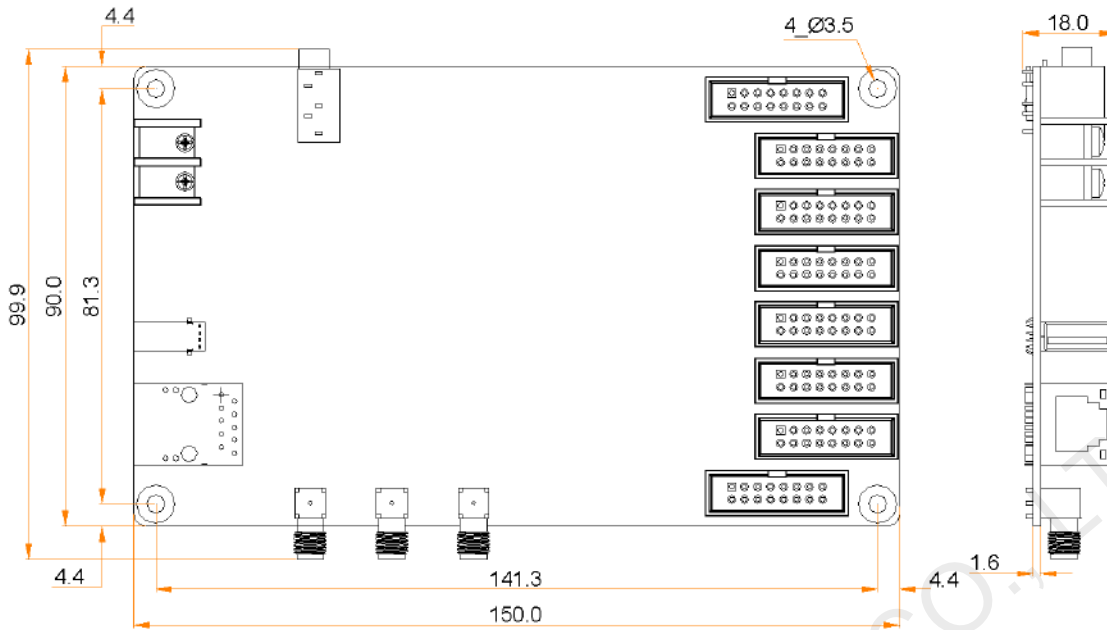

If you want to make molds or trepan mounting holes, please contact NovaStar for structural drawings with higher precision.

Tolerance: ± 0.3 Unit: mm

Pin Definition

JH1	
R1	1
B1	3
R2	5
B2	7
HA1	9
HC1	11
HDCLK1	13
HOE1	15
2	G1
4	GND
6	G2
8	HE1
10	HB1
12	HD1
14	HLAT1
16	GND

BH16-2_54-SD

JH2	
R3	1
B3	3
R4	5
B4	7
HA2	9
HC2	11
HDCLK2	13
HOE2	15
2	G3
4	GND
6	G4
8	HE2
10	HB2
12	HD2
14	HLAT2
16	GND

BH16-2_54-SD

JH3	
R5	1
B5	3
R6	5
B6	7
HA3	9
HC3	11
HDCLK3	13
HOE3	15
2	G5
4	GND
6	G6
8	HE3
10	HB3
12	HD3
14	HLAT3
16	GND

BH16-2_54-SD

JH4	
R7	1
B7	3
R8	5
B8	7
HA4	9
HC4	11
HDCLK4	13
HOE4	15
2	G7
4	GND
6	G8
8	HE4
10	HB4
12	HD4
14	HLAT4
16	GND

BH16-2_54-SD

JH5	
R9	1
B9	3
R10	5
B10	7
HA5	9
HC5	11
HDCLK5	13
HOE5	15
2	G9
4	GND
6	G10
8	HE5
10	HB5
12	HD5
14	HLAT5
16	GND

BH16-2_54-SD

JH6	
R11	1
B11	3
R12	5
B12	7
HA6	9
HC6	11
HDCLK6	13
HOE6	15
2	G11
4	GND
6	G12
8	HE6
10	HB6
12	HD6
14	HLAT6
16	GND

BH16-2_54-SD

JH7	
R13	1
B13	3
R14	5
B14	7
HA7	9
HC7	11
HDCLK7	13
HOE7	15
2	G13
4	GND
6	G14
8	HE7
10	HB7
12	HD7
14	HLAT7
16	GND

BH16-2_54-SD

JH8	
R15	1
B15	3
R16	5
B16	7
HA8	9
HC8	11
HDCLK8	13
HOE8	15
2	G15
4	GND
6	G16
8	HE8
10	HB8
12	HD8
14	HLAT8
16	GND

BH16-2_54-SD

Pin Definitions						
/	R	1	2	G	/	
/	B	3	4	GND	Ground	
/	R	5	6	G	/	
/	B	7	8	HE	Line decoding signal	
Line decoding signal	HA	9	10	HB		
	HC	11	12	HD		

Shift clock	HDCLK	13	14	HLAT	Latch signal
Display enable	HOE	15	16	GND	Ground

Specifications

Maximum Supported Resolution	512×384 pixels	
Electrical Parameters	Input voltage	DC 4.5 V~5.5 V
	Maximum power consumption	10 W
Storage Space	RAM	1 GB
	Internal storage	8 GB (4 GB available)
Operating Environment	Temperature	-20°C to +60°C
	Humidity	0% RH to 80% RH, non-condensing
Storage Environment	Temperature	-40°C to +80°C
	Humidity	0% RH to 80% RH, non-condensing
Physical Specifications	Dimensions	150.0 mm × 99.9 mm × 18.0 mm
	Net weight	121.3 g
Packing Information	Dimensions	278.0 mm × 218.0 mm × 63.0 mm
	List	<ul style="list-style-type: none"> • 1x TCC70S • 1x Omnidirectional Wi-Fi antenna • 1x 4G antenna • 1x Quick Start Guide
System Software	<ul style="list-style-type: none"> • Android operating system software • Android terminal application software • FPGA program 	

The power consumption may vary according to the setup, environment and use of the product as well as many other factors.

Audio and Video Decoder Specifications

Image

Item	Codec	Supported Image Size	Container	Remarks
JPEG	JFIF file format 1.02	48×48 pixels~8176×8176 pixels	JPG, JPEG	No support for non-interlaced scan Support for SRGB JPEG Support for Adobe RGB JPEG
BMP	BMP	No restriction	BMP	N/A
GIF	GIF	No restriction	GIF	N/A

Item	Codec	Supported Image Size	Container	Remarks
PNG	PNG	No restriction	PNG	N/A
WEBP	WEBP	No restriction	WEBP	N/A

Audio

Item	Codec	Channel	Bit Rate	Sampling Rate	File Format	Remarks
MPEG	MPEG1/2/2.5 Audio Layer1/2/3	2	8kbps~320K bps, CBR and VBR	8kHz~48kHz	MP1, MP2, MP3	N/A
Windows Media Audio	WMA Version 4/4.1/7/8/9, wmapro	2	8kbps~320K bps	8kHz~48kHz	WMA	No support for WMA Pro, lossless codec and MBR
WAV	MS-ADPCM, IMA-ADPCM, PCM	2	N/A	8kHz~48kHz	WAV	Support for 4bit MS-ADPCM and IMA-ADPCM
OGG	Q1~Q10	2	N/A	8kHz~48kHz	OGG, OGA	N/A
FLAC	Compress Level 0~8	2	N/A	8kHz~48kHz	FLAC	N/A
AAC	ADIF, ATDS Header AAC-LC and AAC-HE, AAC-ELD	5.1	N/A	8kHz~48kHz	AAC, M4A	N/A
AMR	AMR-NB, AMR-WB	1	AMR-NB 4.75~12.2Kbps@8kHz AMR-WB 6.60~23.85Kbps@16kHz	8kHz, 16kHz	3GP	N/A
MIDI	MIDI Type 0/1, DLS version 1/2, XMF and Mobile XMF, RTTTL/RTX, OTA, iMelody	2	N/A	N/A	XMF, MXMF, RTTTL, RTX, OTA, IMY	N/A

Video

Type	Codec	Resolution	Maximum Frame Rate	Maximum Bit Rate (Under Ideal Conditions)	Type	Codec
MPEG-1/2	MPEG-1/2	48x48 pixels ~ 1920x1080 pixels	30fps	80Mbps	DAT, MPG, VOB, TS	Support for Field Coding
MPEG-4	MPEG4	48x48 pixels ~ 1920x1080 pixels	30fps	38.4Mbps	AVI, MKV, MP4, MOV, 3GP	No support for MS MPEG4 v1/v2/v3, GMC, DivX3/4/5/6/7 .../10
H.264/AVC	H.264	48x48 pixels ~ 1920x1080 pixels	1080P@60fps	57.2Mbps	AVI, MKV, MP4,	Support for Field Coding, MBAFF

Type	Codec	Resolution	Maximum Frame Rate	Maximum Bit Rate (Under Ideal Conditions)	Type	Codec
					MOV, 3GP, TS, FLV	
MVC	H.264 MVC	48x48 pixels ~ 1920x1080 pixels	60fps	38.4Mbps	MKV, TS	Support for Stereo High Profile only
H.265/HEVC	H.265/ HEVC	64x64 pixels ~ 1920x1080 pixels	1080P@60fps	57.2Mbps	MKV, MP4, MOV, TS	Support for Main Profile, Tile & Slice
GOOGLE VP8	VP8	48x48 pixels ~ 1920x1080 pixels	30fps	38.4 Mbps	WEBM, MKV	N/A
H.263	H.263	SQCIF (128x96), QCIF (176x144), CIF (352x288), 4CIF (704x576)	30fps	38.4Mbps	3GP, MOV, MP4	No support for H.263+
VC-1	VC-1	48x48 pixels ~ 1920x1080 pixels	30fps	45Mbps	WMV, ASF, TS, MKV, AVI	N/A
MOTION JPEG	MJPEG	48x48 pixels ~ 1920x1080 pixels	30fps	38.4Mbps	AVI	N/A

Note: The output data format is YUV420 semi-planar, and YUV400 (monochrome) is also supported by H.264.

Copyright © 2022 Xi'an NovaStar Tech Co., Ltd. All Rights Reserved.

No part of this document may be copied, reproduced, extracted or transmitted in any form or by any means without the prior written consent of Xi'an NovaStar Tech Co., Ltd.

Trademark

NOVA STAR is a trademark of Xi'an NovaStar Tech Co., Ltd.

Statement

Thank you for choosing NovaStar's product. This document is intended to help you understand and use the product. For accuracy and reliability, NovaStar may make improvements and/or changes to this document at any time and without notice. If you experience any problems in use or have any suggestions, please contact us via the contact information given in this document. We will do our best to solve any issues, as well as evaluate and implement any suggestions.

Official website
www.novastar.tech

Technical support
support@novastar.tech