


PT PRO P2.5


Indoor Smart LED Poster

**INTEGTAED
MARKET
VALUE**



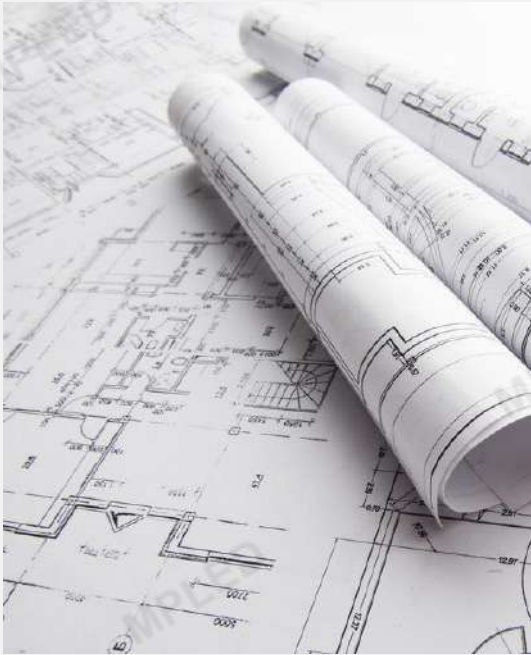

A LITTLE BIT OF HISTORY

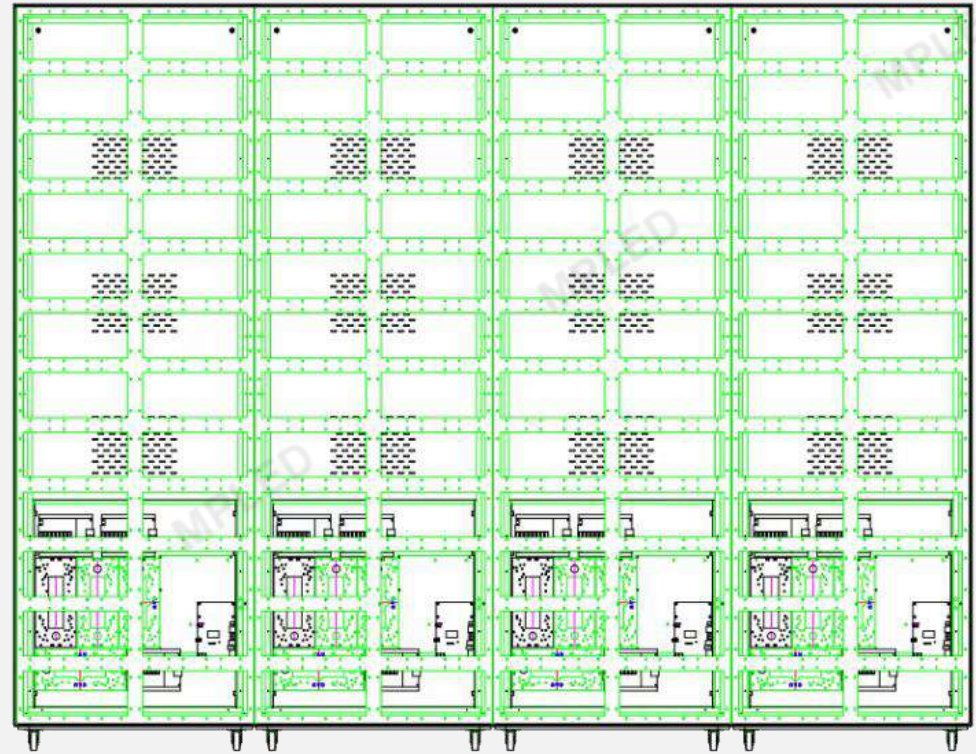



HDMI



USB



APP



PC



RJ45



Cloud

Multiple control methode



Cloud control without limit for distance and time.

Whenever and wherever you are, more than 5000pcs can well control at the same time.





Support for synchronous and asynchronous control freely switch
Support for unit panel independent work and many joint pieces work together as big led screen



Floor stand with wheels



Floor stand



Hanging



Wall mounting



PROJECTS & APPLICATION



Specification for P2.5 Led Poster

Pixel pitch	2.5mm
LED configuration	SMD2020
Brightness	1200 nits
Viewing angle	140°/ 160 (50% brightness)
Scan mode	1/32
Refresh rate	1920Hz
Processing	16 bits
Module size	320mm x 160mm (W x H)
Panel size	640mm x 1920mm (W x H)
Panel weight	41.5kg
Input voltage	AC110~240V 50/60 HZ
Power consumption (Avg)	203W/sqm
Power consumption (Max)	675W/sqm
Working temperature	-20°C~60°C
IP rating	IP30
Life span	100,000 hrs
Warranty	24 months



MPLIED[®]



SHENZHEN MP LED TECHNOLOGY Co., LTD



<https://www.mpled168.com>



Blog B, Building 10, Huafeng Industrial Zone, Fuyong, Baoan,
Shenzhen, Guangdong Province. 518103



mpled@mpled.cn

